

BMX BRAKE LEVER



1. Lever installation

Clamp levers R (right) and L (left) to handlebar with 5mm Allen key. Final tightening torque:6-8Nm.

2. Cable installation

A & AC Series : Pass brake inner cable through slot in lever bracket and place brake-cable nipple firmly into nipple slot. Set adjusting-barrel so as to enable later adjustment. Ensure brakes are properly installed.

AG Series : Pass brake inner cable through slot in lever bracket and place brake-cable nipple firmly into upper nipple slot for LINEAR PULL brakes or lower nipple slot for non-LINEAR PULL brakes (cantilever, caliper & U-brakes). Set adjusting-barrel so as to enable later adjustment. Ensure brakes are properly installed. Do not use upper slot with non-LINEAR PULL brakes or lower slot with LINEAR PULL brakes.

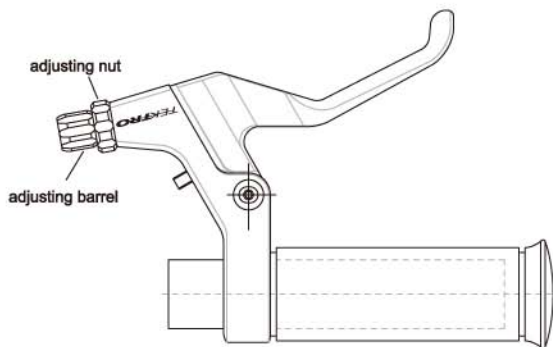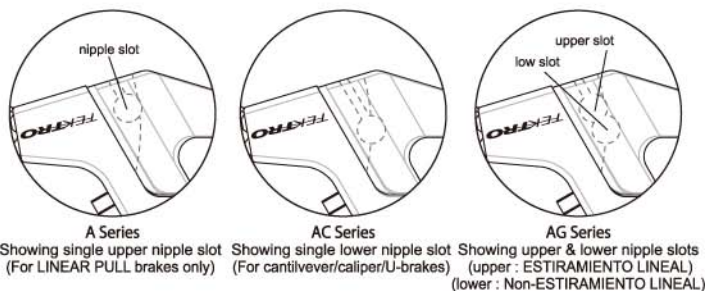

3. Test lever by depressing it a few times. Turn adjusting barrel to recommended pad/rim clearance (1mm each side on most brakes).

Consult your TEKTRO dealer if you are unsure about installation or adjustment.

CAUTION

LINEAR PULL ONLY LEVERS MUST BE USED WITH LINEAR PULL BRAKES ONLY. LINEAR PULL BRAKES OFFER CONSIDERABLE BRAKING POWER WITH LITTLE LEVERAGE FORCE, AND REQUIRE PRACTICE AT LOW SPEEDS BEFORE NORMAL USE. TEKTRO IS NOT LIABLE FOR DAMAGE OR INJURY AS A RESULT OF IMPROPER INSTALLATION OR USE.

INSTALLATION INSTRUCTIONS INSTALLATIONS ANLEITUNG INSTRUCTIONS D'INSTALLATION INSTRUCCIONES DE INSTALACIÓN インストールの手順

BMX Brake Lever BMX BREMS HEBEL LEVIERS DE FREINS BMX MANETAS DE FRENOS BMX BMX ブレーキレバー

Designed from scratch for BMX. A Series for LINEAR PULL brakes only. AC Series for use with cantilever/caliper/U-brakes. AG Series features Brake Type Adjustment- for LINEAR PULL & non-LINEAR PULL brakes. 10mm-diameter cable adjusting barrel for smoother braking. Reach-adjustment volt adjust lever position for comfortable grip.

Von Grund auf für BMX erdacht. A Serie nur für LINEARE ZUG-Bremsen. AC Serie pour cantilever/caliper/U-bremsen. AG Serie bietet Bremstypeneinstellung-für LINEARE ZUG & nicht-LINEAR-ZUG-Bremsen. 10mm-kabel Einstellbüchse, für reibungsloseres Bremsen. Bereichseinstellung justieren die Position des Hebels für komfortablen Griff.

Conçue depuis le départ pour le BMX. Séries A pour les étriers À TIRAGE DIRECT seulement. Séries AC pour les étriers cantilevers/calipers/U-brakes. Séries AG comportent l'Ajustement Type de Frein-pour les étriers À TIRAGE DIRECT et non-À TIRAGE DIRECT. Barillet de réglage du câble de 10mm de diamètre pour un meilleur freinage. Réglage d'atteinte de poignée règle la position de la poignée pour une saisie confortable.

Diseñado de nada para BMX. Serie A sólo para frenos ESTIRAMIENTO LINEAL. Serie AC para frenos cantilever y frenos-U. Serie AG figura un Ajuste de Tipo de Freno-para frenos ESTIRAMIENTO LINEAL y no-ESTIRAMIENTO LINEAL. El barril de ajuste de cable de 10mm de diámetro para un frenaje más tranquilo. Perno de ajuste de alcanza ubica la maneta para un dominio más cómodo.

完全に BMX または用に設計されています。A はリアアブルブレーキ専用です。AC はカンチレバー / キャリパー / Uブレーキ使用です。AG はリアアブルおよびリアアブル以外のブレーキに対して調整機能を提供します。直径10 のケーブル調整筒によってスムーズなブレーキ性能を得ることができます。また、力量調整ボルトを使って、レバーの位置をあなたの使用に合わせて、調整することができます。

TEKTRO
TEKTRO TECHNOLOGY CORPORATION

http:// www.tekro.com
E-mail:info@tekro.com.tw

Edition-April, 2010-C1